












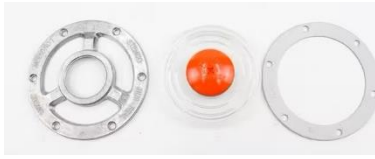






HUB CAP KITS & PARTS

<p>RUBBER PLUG (SMALL) Part Number 359-5915</p>  <p>Plug Diameter 3/4" or 19mm</p>	<p>RUBBER PLUG (LARGE) Part Number 359-5990</p>  <p>Plug Diameter 1-1/8" or 28.5mm</p>	<p>ESP + PLUG (Pack of 2) Part Number 359-6124</p>  <p>Plug Diameter 1-1/8" or 28.5mm</p>	<p>ESP FILTERED VENT Part Number 359-6137</p>  <p>3/8" NPT Thread Diff Breather (On-Highway Use Only)</p>
<p>FILLER PLUG (METAL) Part Number 359-5984</p>  <p>Magnetic Plug 3/8" of 9.5mm</p>	<p>FILLER PLUG (COMPOSITE) Part Number 641-0002</p>  <p>Magnetic Plug 3/8" of 9.5mm</p>	<p>WINDOW SCREWS Part Number 359-6032</p>  <p>Window Screws (Set of 6)</p>	<p>WINDOW GASKET Part Number 359-5991</p>  <p>Gasket Suit 3-1/2" or 88.9mm</p>
<p>WINDOW KIT Part Number 359-5912</p>  <p>Window 4-3/8" or 111.1mm Rubber Plug 3/4" or 19mm</p>	<p>WINDOW KIT Part Number 359-5995</p>  <p>Window 3-1/2" or 88.9mm Rubber Plug 1-1/8" or 28.5mm</p>	<p>WINDOW KIT Part Number 359-5999</p>  <p>Window 2-3/4" or 69.8mm Rubber Plug 1-1/8" or 28.5mm</p>	<p>WINDOW KIT Part Number 359-6095</p>  <p>Gasket Suit 3-1/2" or 88.9mm Dirt Exclusion (Grease Only)</p>
<p>WINDOW KIT Part Number 359-6100</p>  <p>Window 3-1/2" or 88.9mm Rubber Plug 3/4" or 19mm</p>	<p>WINDOW KIT Part Number 359-6112</p>  <p>Window 3-1/2" or 88.9mm Integrated Sentinel Plug</p>	<p>WINDOW KIT Part Number 359-6143</p>  <p>Window 2-3/4" or 69.8mm Integrated Sentinel Plug</p>	<p>WINDOW KIT Part Number 359-6145</p>  <p>Window 3-1/2" or 88.9mm Integrated Sentinel Plug</p>

SENTINEL ESP PLUS

- Waterproof GoreTex Membrane
- Splash Guard Shield

To relieve vacuum, the Sentinel interior check valve lifts slightly, drawing air into the wheel end through the water-resistant filter. The duck-bill check valve remains closed, blocking dirt, grime and other contaminants from entering.



A second O-ring increases plug retention.

To relieve pressure, the duck-billed pressure relief valve opens, allowing pressure to vent out.



STEMCO®

Making the Roadways Safer®

AUSTRALIA, NEW ZEALAND, PAPUA NEW GUINEA

Customer Service 02-9793-2599

2/198 Walters Road

Arndell Park NSW 2148 Australia